

POWER QUALITY ANALYZER



Power Quality Class A+

according to IEC61000-4-30 Ed. 4
Harmonics, Interharmonics, TDD, THD
up to 20.000 samples per period

Supraharmonics 20 kHz

2-9kHz (200Hz) according to IEC61000-4-7
8-20kHz (200Hz) according to IEC61000-4-30

Grid Impedance 20 kHz

Resonance Detection 20 kHz
Harmonic emission limit allocation

Oscillation Detection

Half-period RMS stream, Phasor Measurement Unit
Oscillation detection (sub-synchronous)

Highest Precision

0.05% Accuracy
TVE <0.01% (100 Times better than IEC/IEEE Std).

PQA7000



PQA7000
fixed installation



PQA7000
mobile

POWER QUALITY ANALYZER

PQA-7000

Portable, compact, and smart multi-channel high-speed measurement device



SMART TOUCH

The 7 inch Smart Touch display responds immediately without any delay with intuitive operation like on a mobile phone.

MOBILE OPERATION

The integrated battery pack allows an operating time of up to 6 hours of operation. 5 LEDs indicate the remaining battery capacity. There is no need for an external power supply or special connectors... plug and play.

GPS

Integrated GPS enables high-precision time measurements & synchronization, which is ideal for PMU applications.

STORAGE

The instrument offers an internal memory of 32 GB which can be extended up to 256GB. The storage can further be increased by a USB disk.

INTERFACES

The instrument provides an easy integration with other analog and digital signals such as temperature. The interfaces include USB 3.0, TCP/IP, LAN, Wifi, Bluetooth, RS232, Modbus, 104, DI, and CAN.

SENSOR SUPPLY

The instrument can provide excitation for your current sensors, and there is no need for batteries or external power supplies.

POWER QUALITY ANALYZER



PQA7000



HIGH ACCURACY	0.05%
HIGH SAMPLING RATE	48 kS/s
HIGH RESOLUTION	24bit
HIGH DYNAMIC RANGE	0.5mA to 150kA
HIGH SAFETY CATEGORY	CAT IV 600V
DATA STORAGE	up to 2 TB
INPUTS	4x Voltage / 5x Current
CLAMP POWER SUPPLY	+9V / +-15V
INTERFACES	LAN, WLAN, BT, LTE, DIO, CAN

INSTRUMENT OPTIONS:



**PQA7000 with
external display**



PQA7000RM Rack Mount



**PQA7000 with
internal display**

HARDWARE



GENERAL SPECIFICATIONS

PC	Microsoft® Windows 10 IOT(64 bit) Intel® Quad Core Processor and 4GB RAM Multilanguage Support
Storage	32GB
Display	7 inch Capacitive Multi-Touch TFT LCD Sunlight Readable
Battery	Li-Ion Battery 80Wh up to 6h operation
Power Supply	10-30 V DC
Interfaces	2x USB, 1x Ethernet, WiFi
Dimensions	250 x 190 x 80 mm 9.84 x 7.5 x 3.2 inch
Weight	2,3kg / 5 pound
Temperature Range	Operating: 0 to 60°C (32°F to 140°F) Storage: -20 to 80°C (-4°F to 176°F)
IP Class	IP2X
Accessories	Transport Bag and Keyboard included
Standards & Certification	IEC61010-1 (2011) / IEC61010-2-030 / IEC 61000-4-3 / IEC 61000-4-4 / LVD Directive 2014 / EMC Directive 2014/ RoHS Directive 2015/ EN 61000-3-2 / EN 61000-3-3 / EN 61326-1 / EN 55011 +A1, Class A

CUSTOMIZE DESIGN

Choose your color



Connector Color

-select the color of the connectors to match cabling or standards



Customized Logo for Hard- & Software

- add your own logo for comprehensive CI




HIGHLIGHTS

VOLTAGE INPUTS

Inputs	4x
Range	1600V/ 800V
Accuracy	0.05% f.s.
Isolation	6kV isolation
Safety	CAT III 1000V CAT IV 600V
Impedance	10 MΩ

CURRENT INPUTS

Inputs	5x
Accuracy	0.05% f.s.
Type	Clamp or Rogowski
Instrument Ranges Clamp	2mV to 10V (15x Ranges)
Integrator Rogowski Range	1A to 300kA
Sensor Supply	±15V
TEDS	Automatic Sensor Detection*
Impedance	10 MΩ

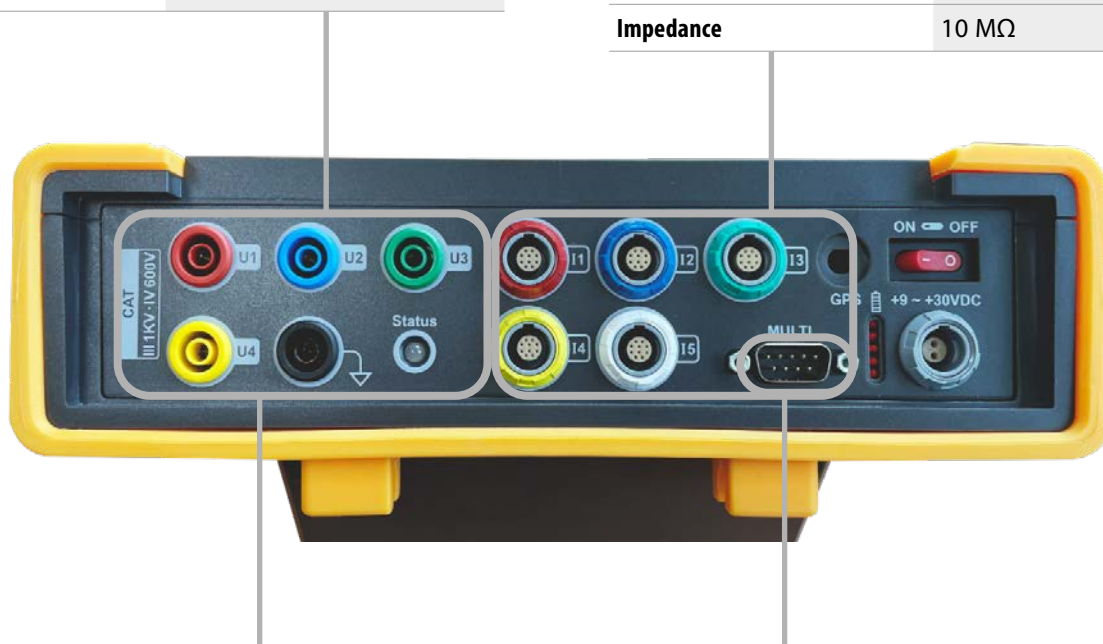

ANALOG DIGITAL CONVERSION (A/D)

Sampling Rate	48 kS/s
Resolution	24 bit
Filters	Analogue and Digital Automatic Anti-Aliasing Filter

DIGITAL IN & INTERFACES


Digital In	Adjustable Trigger
CAN, RS485	Selectable Termination

OPTIONS AND ACCESSORIES

Storage Upgrade	Upgrade to 256 GB data storage
GPS	Integrated GPS receiver and GPS mouse
Transport Case	Ruggedized Pelican-Case (IP67), with foamed insert adapted for the measurement instrument and pullout handle
Color Code	Color code for all voltage and current inputs
Current Sensor	See Chapter Accessories
Test Leads	See Chapter Accessories



Connection of any sensor

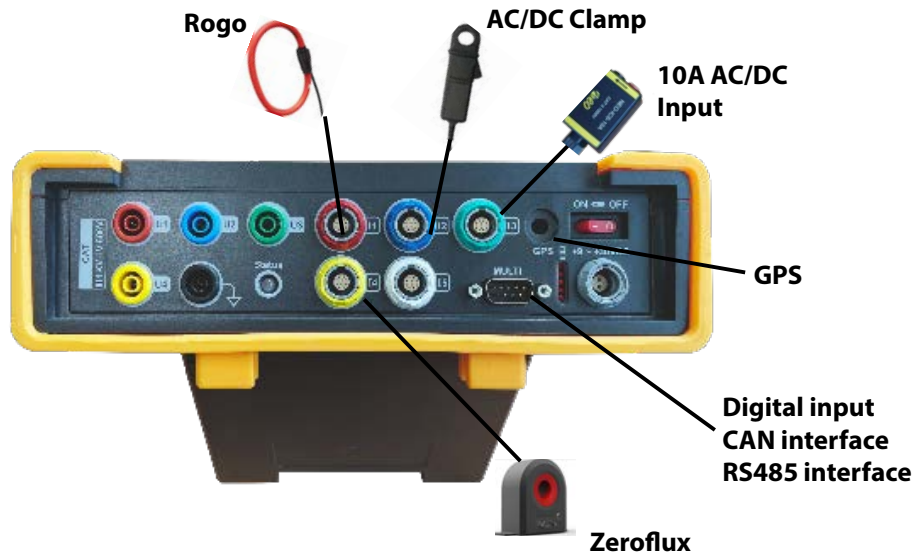


HIGHEST PRECISION

The NEO way of Sensor Integration

All current sensors offered by NEO Messtechnik are industry proven for different applications. We use and improve on the best available sensors in the market.

1) FREQUENCY DEPENDENT CALIBRATION

The NEO sensor integration calibrates each sensor over a wide frequency bandwidth and corrects frequency dependent phase shift and amplitude damping. This enables high precision from DC to high-frequency measurements.

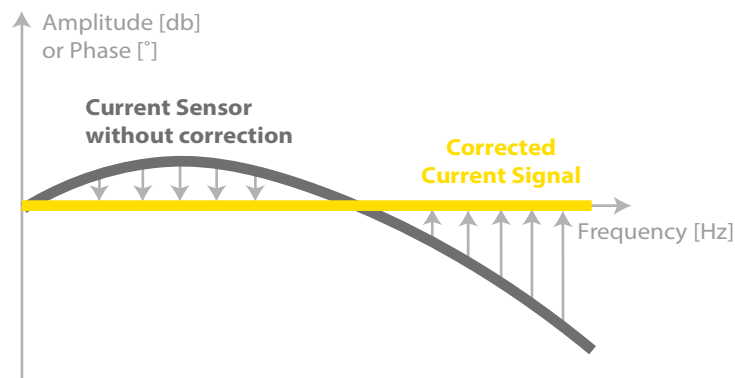

2) MEASUREMENT RANGE DEPENDENT CALIBRATION

In addition, the sensors will be calibrated for each measurement range using multiple points. The calibration will typically cover points from 1% to 100% of the nominal measurement range. This will improve the accuracy and precision, especially at low current (e.g., 1% of nominal measurement range).

All sensors will be delivered with a standard calibration, which improves the accuracy compared to nominal specifications, whereas the NEO calibration will be performed on each individual sensor and needs to be ordered separately.

3) Signal-to-Noise Ratio (SNR)

NEO PQA7000 Series have a high signal-to-noise ratio (SNR) which means that even low currents (micro amperes) are measured accurately across the full range (DC to 500 kHz). In comparison, other analyzers on the market will measure noise, even at the fundamental frequency. NEO is state-of-the-art hardware.



PQA7000 - EVSE



Example with Type 2 connector

PQA7000 upgrade to Pelicase for **Plug&Play** operation with the following optional integrations:

- Current sensors like rogowski or zeroflux transducers inside the Pelicase
- Power Supply CATIV 230V/400V to supply directly
- Residual current monitor for Leakage current measurement
- CP Measurement
- Auxiliary sensors and interfaces (CAN etc.)
- 12V vehicle board system power supply with polarity protection and fuse
- Grid Impedance Analyser
- PLC (Power Line Communication Sniffer)
- Virtual vehicle switch for EV Charging station tests
- Connection cable Type 2 or any other connector possible (SAE, GB)

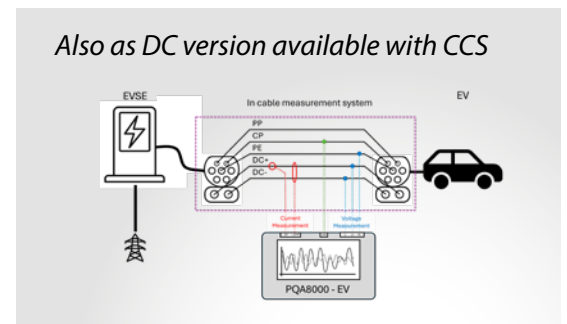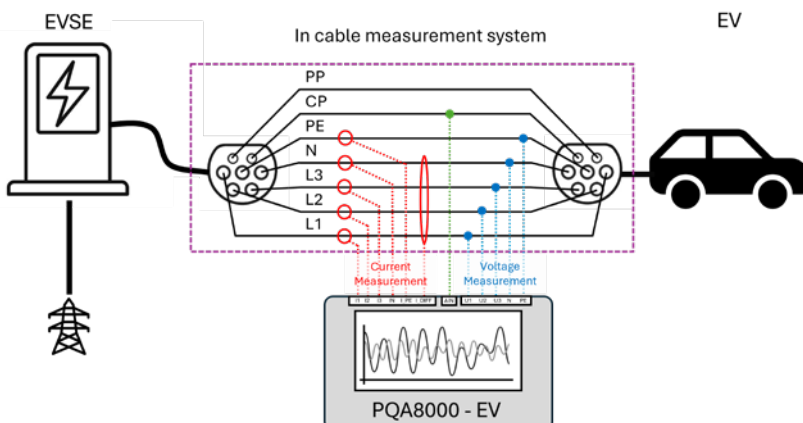

Also as DC version available with CCS

World's best

Grid Impedance Analyzer



Specifications

Measurement Range	230 V / 400 V / (Option 690 V)	
Safety Category	CAT IV 300V (Option 600V)	
Frequency Range	up to 20 kHz (Option 450 kHz)	
Frequency Nominal	50 Hz / 60 Hz / 16.7 Hz / DC	
Resolution	18 bit	
Signal-to-Noise Ratio (SNR)	>100 dB	
Excitation time	400ms	
Max. Current	5A rms	
Wiring	L-N / L-L (Option: 3-Phase)	
Battery	4 hours (powered by PQA8000H)	
Export	CSV, RAW, JPG	
Weight	2 kg	
Dimensions (LxBxH)	GIA1	272x248x130mm
	GIA3	272x248x182mm

- COMPACT DESIGN
- MOBILE OPERATION
- HIGH ACCURACY
- FAST MEASUREMENT



Grid Impedance




Power Quality


Grid Impedance Analyser GIA1 and GIA3



PERFECT EXTENSION FOR PQA7000

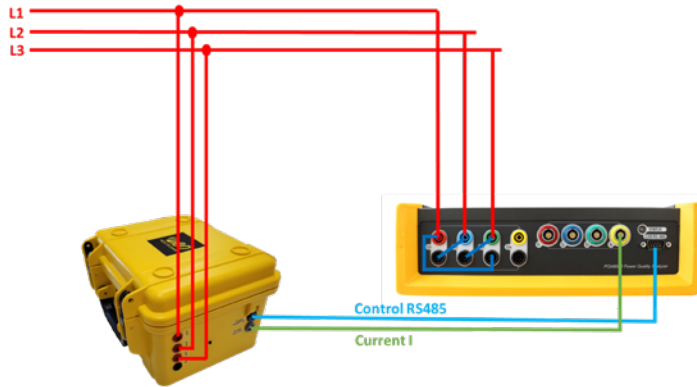

GIA3
for 3-phase application
(star or delta)

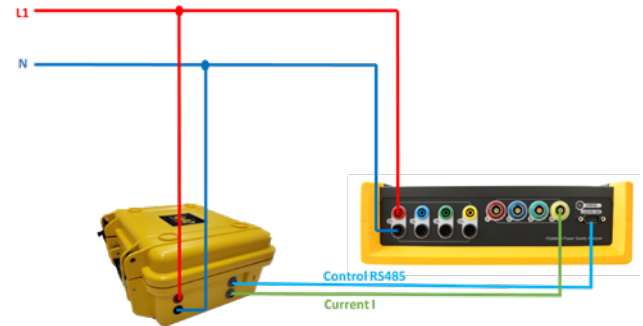

GIA3
for single phase application
(line-to-line measurement possible)

- 50/60 Hz Impedance
- Harmonic Impedance to 2 kHz
- Supraharmonic Impedance to 20 kHz
- PLC Impedance to 450 kHz
- DC Grid Impedance & Stability




2D Chart & Plotter


Comparison of different measurements /
Damping Analysis for 2 measurement points



Table View

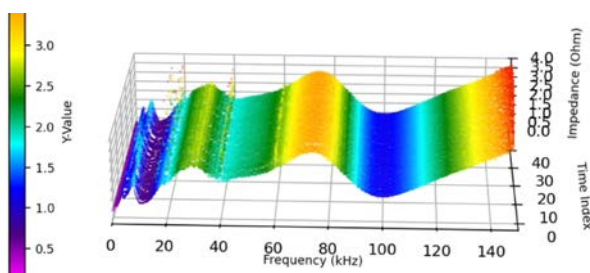

3D Chart for long-term measurement

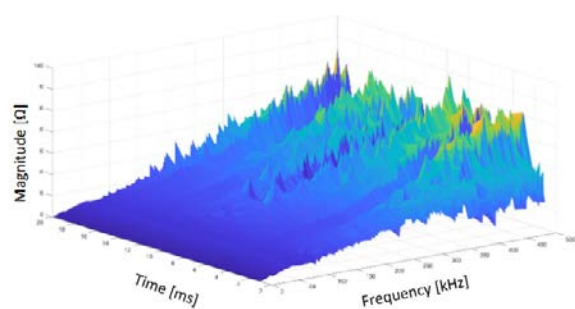

Subcycle Impedance

19-inch Rack Mount Premium PMU

PQA-7000RM Rack Mount Version
 19-inch 2U Rackmount with 310mm Depth
 Connections & Terminations customizable
 Integrated High Precision Current Sensors optional
 Over 100 parameters at 10ms or 20ms (cycle-by-cycle)



Data Driven Solutions

Power Quality, Synchrophasor (PMU), BESS, FCAS, Fault Location (wires meters), Protection, Control, Asset Health, Bushfire Prevention, Oscillations, Supraharmonics, Grid Impedance, Islanding, and more.



Analytics

Real-time Visualisation & Insights (400x SCADA), Historical Analytics, Modelling, Compliance Reporting, Any Device, Any Sensor, Any System.




Digital Twin & Context

Understand Data in Context with Digital Twin, Asset Metadata, Geospatial (GIS), Big Data, TSO, DSO, Private Grids, and Individual Facilities.



Artificial Intelligence & Custom Apps

Modular, Scalable, Custom Apps, Artificial Intelligence for Anomaly Detection, Prediction, Analysis, Classification, and more. API available.

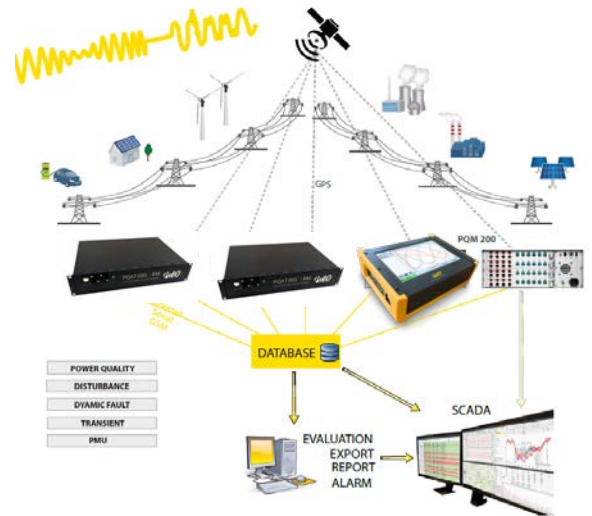

Real-time synchronized grid monitoring, power quality analysis, asset management, fault analysis, oscillation detection, model validation, artificial intelligence, and wide-area monitoring — unified in one powerful platform.

Synchrophasor

Real-time phasor measurement data via IEEE 60255-118-1 / C37.118 up to 100/200 frames per second that is **x400 times faster than SCADA Systems**

Power Quality

Comprehensive PQ analysis tools, compliance standards (EN50160 and IEEE-519, custom compliance), report, **export to industry standard formats.**

WAMS

Multi-Sensor **synchronized investigations on the same timescale** for stability analysis, event propagation, oscillation detection, and more.

Oscillation Detection & Stability Monitoring

Continuous sub-synchronous monitoring of oscillatory behaviour with state-of-the-art methods and visualization.

Artificial Intelligence & ML

With SmartGRID EDGE X1 Hardware (powered by NVIDIA), experience world-class classification models for power quality, anomaly detection, more

Built-in Jupyter Notebooks, Grafana, APIs

Use SmartGRID's built-in analysis dashboards or conduct your own analysis with built-in Jupyter Notebooks & Grafana.

Interfaces:

- Modbus TCP
- DNP3
- C37.118
- PQDif
- Comtrade
- CSV / Excel
- API

Retrospective PMU Data Recall (RPDR) – Most PMUs can only stream data to a data concentrator, which means during communication failures PMU data is often lost. With SmartGRID's RPDR feature, PMU data is never lost, and data is filled back in retrospectively when using SmartGRID EDGE X1 Hardware (powered by NVIDIA) connected locally to the PMU sensor, or natively supported by the PMU (such as NEO PQA-7000 Series).

Dynamic Measurement International Grid Codes



Voltage & Current Sampling Rate (Not Stated, 1024 samples/cycle Recommended)	48 kJ/s
Voltage & Current Accuracy (Not Stated, 0.1% Recommended)	<0.05% for BOTH voltage and current for full range. <0.02% (Typical)
Sampling Rate of Local Frequency Measurements (≤50 ms)	10ms (ie. half-period/half-cycle values)
Sampling Rate of Generation Amount & Load Amount Measurements (≤50 ms)	10ms (ie. half-period/half-cycle values)
Measurement Range of Power Flow Measurements (Intrinsic Uncertainty of ≤2%, and Resolution of ≤0.2%)	Yes, guaranteed Intrinsic Uncertainty of ≤2%, and Resolution of ≤0.2% across FULL range.
Local Frequency Measurement Range (Intrinsic Uncertainty ≤0.01 Hz (10mHz) and Resolution of ≤0.0025 Hz (2.5mHz))	Yes, Absolute Frequency Accuracy of ± 0.000550 Hz (± 550 µHz) with Frequency Uncertainty ± 0.000027 Hz (± 27 µHz, k=2, 95% confidence) for ALL Frequencies with Frequency Resolution of 0.000003 Hz (3 µHz).
Recording Period for Power & System Frequency Measurements (≥5 s before FDT and ≥60 s after it)	Yes. 60s before FDT and ≥7200 s after it. User Selectable. Continuous Half-Period (10ms) or Cycle (20ms) Recording Possible.
Trigger for Recording Measurements (At least whenever Local Frequency changes ≥ Trigger Range)	Yes. Trigger on any parameter. User Selectable. Continuous Half-Period (10ms) or Cycle (20ms) Recording Possible.
Cycle-by-Cycle (CBC) Frequency (Not stated, Required)	Yes. High Precision CBC Frequency (20ms values), and Half-Period Values (10ms) also available. User Selectable.
Rate-of-Change-of-Frequency (ROCOF, df/dt) (Recommended)	Yes. High Precision ROCOF
Other Requirements including Reporting	Yes.
IEC/IEEE 60255-118-2018 Synchrophasor Standards for Phasor Measurement Unit (PMU)	
Total Vector Error (TVE) < 1% (considers magnitude, angle, time synchronization errors)	<0.01% (100 Times Better than IEC/IEEE Standards)
Angle Error (<0.573 degrees for TVE <1%)	0.003 degrees
Time Synchronization Accuracy (<1000ns or 1 micro-second)	100ns (typical) through GPS

EXAMPLE AUSTRALIA: EXCEEDS AEMO VERY FAST FCAS REQUIREMENTS

According to AEMO Market Ancillary Services Specification v8.2 the NEO PQA7000 Series:



- Meet and Exceed the MASS/FCAS Specifications for ALL AEMO Very Fast, Fast, Slow, Delayed, Regulation FCAS categories.
- Meets and Exceeds Section 5.3.2 and Table 5 – Measurement Requirements for FCAS (see below)
- Meets Section 5.4 Data Retention (12 months minimum). All FDT Data is stored on the NEO PQA7000 Meter indefinitely, can be exported, and backed up.
- Meets Section 5.5 Reporting Requirements. NEO PQA7000 Meter includes advanced NEO Report and Analysis software to easily export required data as requested by AEMO.
- This datasheet satisfies Section 6.5 and 6.5.1 Traceability of Contingency FCAS metering equipment, where the manufacturer, NEO Messtechnik have internally verified Very Fast FCAS Metering Requirements as per Table 5.

AEMO Very Fast FCAS Requirements per Market Ancillary Services Specification (MASS) v8.2 & Recommendations

1

SETUP

The instrument has a clear structure that shows schematics with explanations.

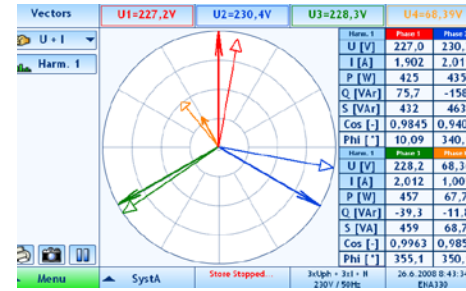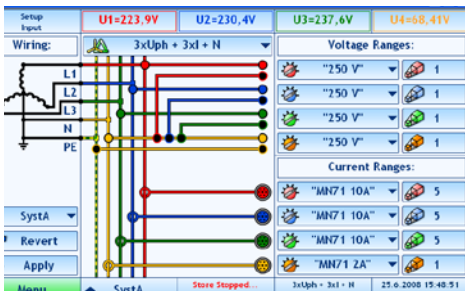

2

MEASURE

During measurements the user can define widgets such as Scopes, Vector Scopes, Harmonic FFTs, Tables, and Recorders.



REMOTE CONNECTION

via AnyDesk®, Teamviewer®, or any other software

TRULY INTUITIVE

Intuitive Measurement menus: Clearly structured and explicit menus

HIGHLIGHTS

3 ANALYZE using NEO Report Software or third-party software

Sophisticated functions include PQ Data, Transients, Disturbances, Spectrum, Alarms, and more.



NEO Report (included) & NEO Soft (Advanced Software Option)

SmartGRID EDGE x NEO (Fully Integrated).
Visit smartgridedge.com



4 REPORT

The instrument can automatically generate reports and professional documentation. The user can create reports that include all relevant information (location, comments, company logo, etc) directly on-site or during post processing. PDF reports that are saved on the instrument are always available and can be shared directly via email.

Report
EN50160

Database
SCADA

Remote
Connection





5 EXPORT

Data can be exported into CSV, XLS, PDF, Comtrade, and PQDiff.

6 OTHER PROGRAMS

The instrument uses Microsoft Windows® as the operating system. Programs such as Microsoft Excel, Word or Matlab can be added as well as Email messaging services.

Perfect for power quality assessments and analysis according to international standards

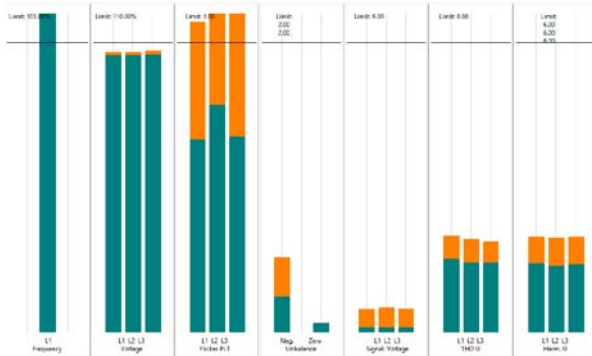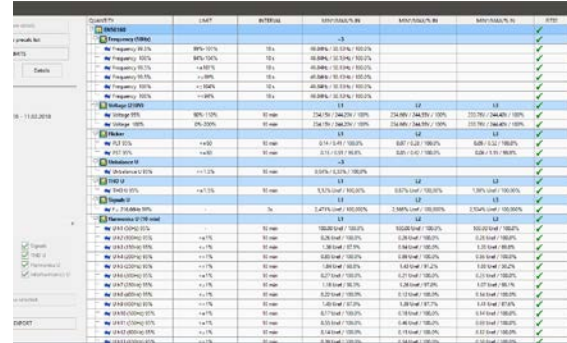Automatic Reporting interface showing a detailed table of power quality analysis results, including parameters like Voltage, Current, Power, and Frequency, with corresponding values and status indicators.

Automatic Reporting









PDF Report generator

Create your own report templates and save a lot of time for data analysis and reporting.

Options for Automatic Report:

- Power Quality Report for IEC and IEEE Standards
- Harmonics, Interharmonics, Subharmonic, Supraharmonics
- Transient auto export
- 1/2 Period RMS Values , Vector diagram
- 2D chart, 3D Chart, table, ITIC, RVC, etc.
- Pictures, text, logo etc.




- EN50160_DE (24 items)
- EN50160_EN (24 items)
- IEC61000-2-2_DE (67 items)
- IEC61000-2-2_EN (73 items)
- IEC61000-2-2_EN_Expert (73 items)
- IEC61000-2-2_EN_Expert_ohneHF (73 items)
- IEC61000-2-2_EN (67 items)
- IEC61000-2-4_EN_Expert (73 items)
- IEC61000-2-4_EN (85 items)
- IEC61000-2-4_EN (85 items)
- IEEE_519-2022_Daily_3s_Interval (32 items)
- IEEE_519-2022_Daily_3s_Interval_1480A (32 items)
- IEEE_519-2022_Weekly_10_min_Interval (37 items)
- IEEE_519-2022_Weekly_10_min_Interval_1480A (37 items)



SOFTWARE ENA Electrical Network Analyser



Example: Harmonic analysis with Immunity, Compatibility and Emission reference standards

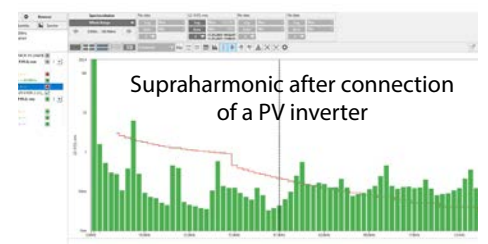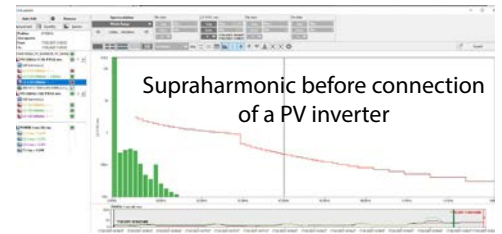
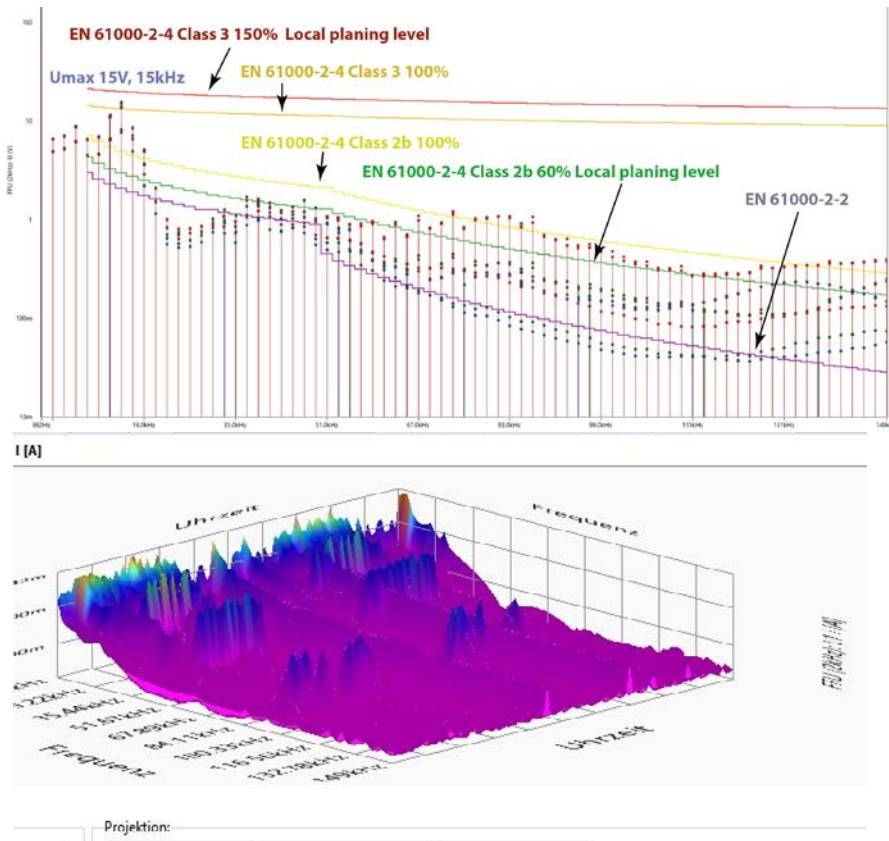


3D Supraharmonic FFT

(Time, Frequency, Amplitude) of a PV inverter over 2 days. The operation of the PV inverter during day time nicely can be seen

Continuous Data storing: Raw data, 1/2 Period, 3s, 1min, 10min

continuous storing with full sampling rate

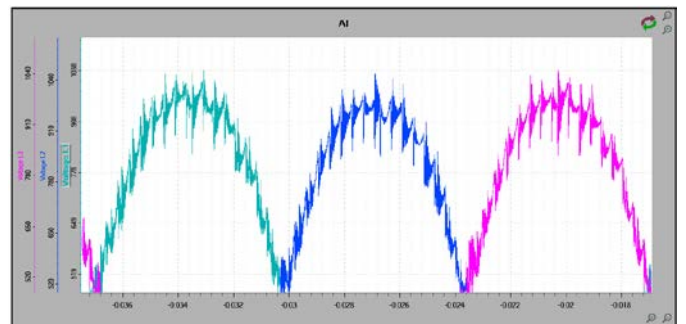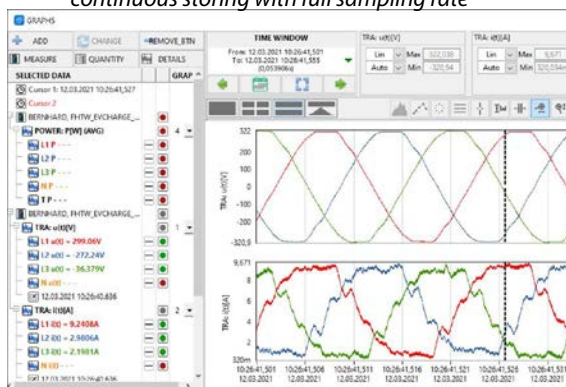

Oscillation detection





based on:
- FFT
- Interharmonics
- PMU

Common Mode and EMC


- Common Mode Voltage
- Common Mode Current
- Leakage Current
- Differential Mode EMC

NEOSoft

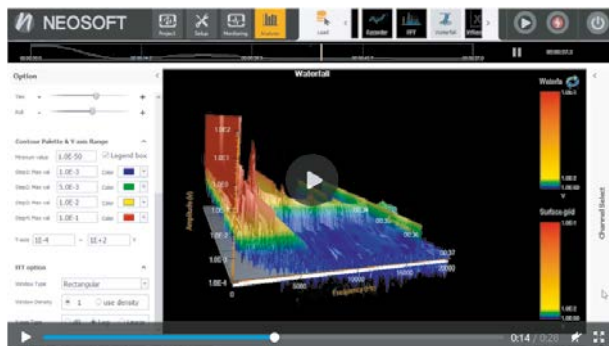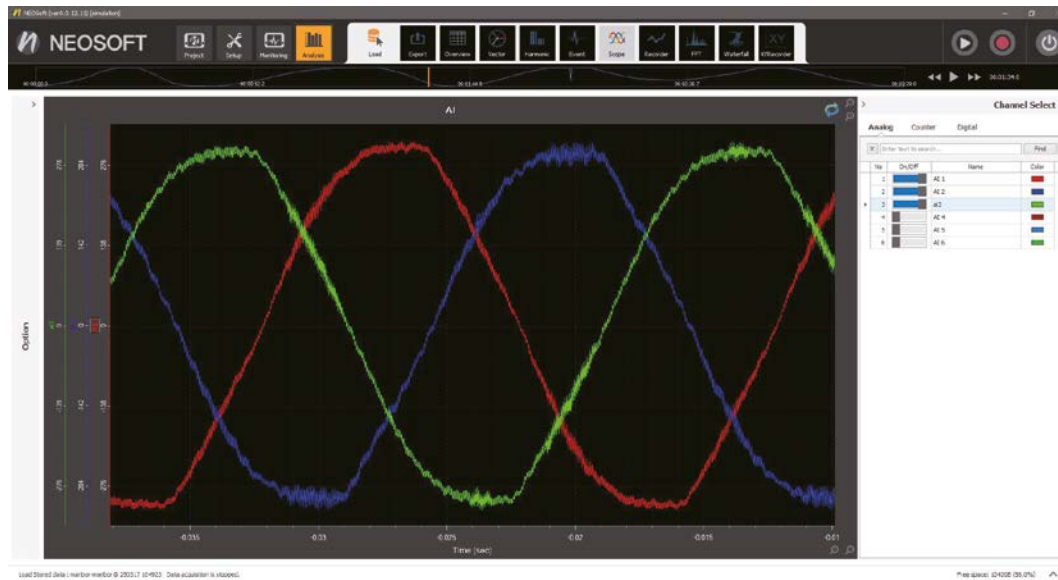

World's most powerful
Data Acquisition Software

*On the fly data analysis during
active measurement*

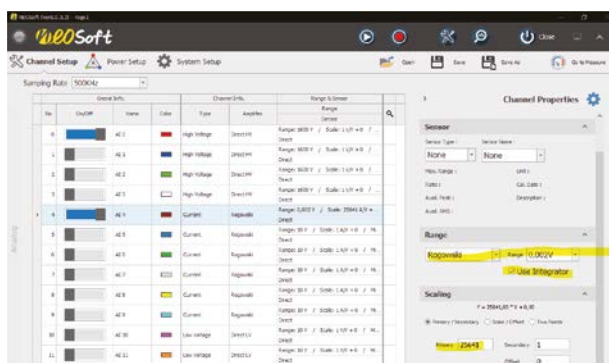


- Continuous Raw Data Recorder
- Power Analyse
- Power Quality Analyser
- FFT Analyser
- Data Logger / Recorder
- Scope Corder


Smart Grid Edge Wide Area Monitoring System




Lossless Compression Up to 90% and 100x faster than traditional SQL databases

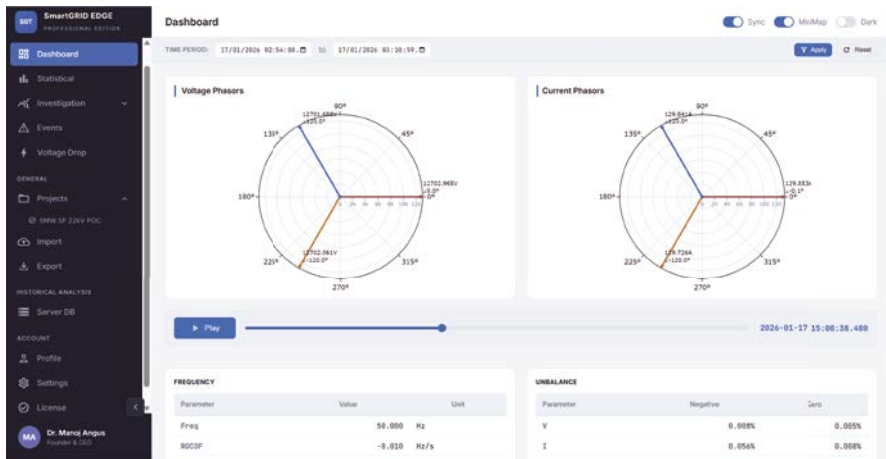

- Power Quality: Class A
- Subharmonics
- Harmonics
- Interharmonics
- Supraharmonics 500 kHz
- Grid Impedance

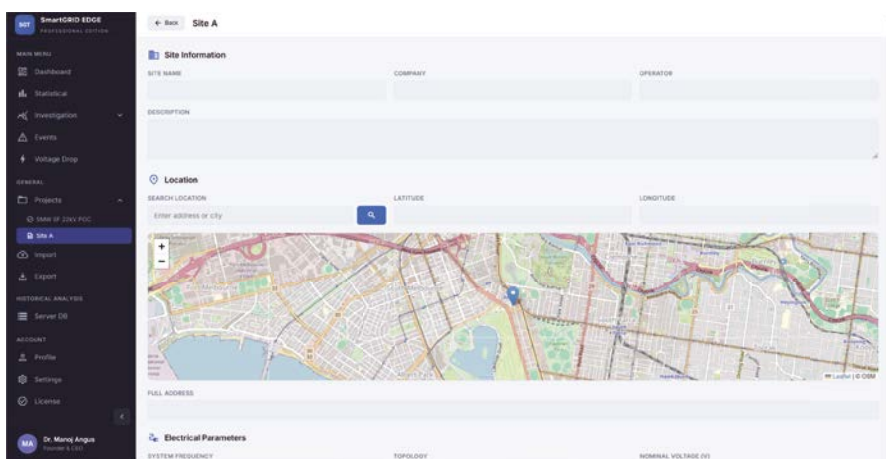


- IEC Reporting (IEC61000-2-2 etc.)
- IEEE Reporting (IEEE519 etc.)
- Grid Codes (AEMO, EN50160 etc.)
- Fault Recording
- Fault Detection

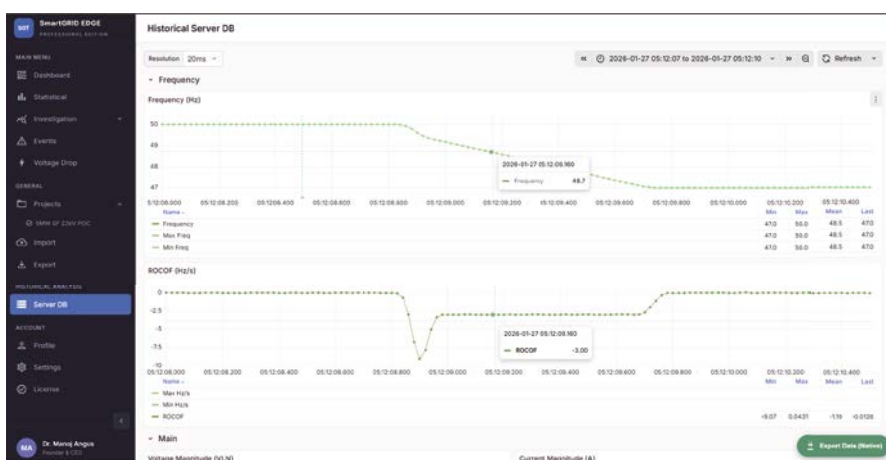

- Phasor Measure Unit
- Oscillation Detection
- 10 ms Disturbance Data
- Raw Data

Customizable Events

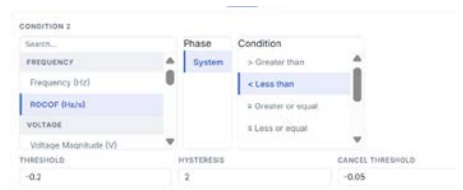


Typical SQL databases were NOT designed to handle high-resolution and high-speed data from sensors, creating bottlenecks and longer wait times for querying data during analysis. SmartGRID Time-Series Database (also known as SGTSDb) is built for speed and fine-tuned for high-resolution time-series data. SGTSDb has lossless compression which means you retain RAW data resolution with lower storage space and lower environmental impact – there are no drawbacks. Based on internal tests, SGTSDb can be up hundreds of times faster than traditional SQL systems.

POWER


**Voltage
Current**




Power



Vector



**Reactive
Power**



Energy

kWh

**Digital
Signalling**




Power Calculation	P, Q, S, PF, cos phi, D, DH, QH
Frequency	10 sec, AVE, MIN, MAX
Voltage, Current	RMS, AVE, MIN, MAX, 1/2 Period-values, 200ms, 10s, 10min
Energy	Total, positive, negative (P, Q, P+, P-, Q+, Q-)
Efficiency	DC / AC, U-I Curve for PV
Wiring	DC, 1-Phase, 2-Phase, 3-Phase Star and Delta

WAVEFORM & TRANSIENTS

Transients



**Resonances
Oscillations**



Switching



DC Offset



Overvoltage



Undervoltage



MIN, MAX, RMS, AVE	U, I, P, Q, S, f, PF, phi, THD, Harmonics, Interharm., Unbalance, etc.
ENVELOPE / WINDOW	U, I
DELTA	dU, dI, df, dP, etc.
DERIVATE (RATE OF CHANGE)	dU/dt, df/dt etc. ... per ms, number of periods or half-period
COMBI-TRIGGER	Combination of triggering including multiple conditions
VOLTAGE SIGNALLING	Threshold
RAPID VOLTAGE CHANGES (RVC's)	dU, dc, dt
EN50160	Trigger on any EN50160 parameter (Max, Quantil)

COMPLYING STANDARDS

POWER QUALITY, HARMONICS, FLICKER:

IEC61000-4-30 Ed. 3 Class A / IEC61000-4-7 / IEC61000-4-15 /
IEC62586-2 Ed. 2 / IEC62586-1

PUBLIC GRID, RAILWAY AND INDUSTRY

EN50160 / EN50163 / IEC61000-2-2 / IEC61000-2-4 (Class 1; 2; 3) /
IEEE519 / IEEE 1159 / IEC61000-2-12 / NRS048


WIND POWER, RENEWABLES AND GRID CODES

IEC61400-21 / IEC61400-12 / FGW-TR3 / VDE N-4105 / VDE N-4100 /
VDE N-4110 / D-A-CH-CZ / BDEW / ROCOF / IEEE C37.118-2005 (PMU)

MOTORS, TRANSFORMERS AND ELECTRICAL EQUIPMENT

IEC60034 / IEC 60076-1 / IEC61000-3-2 / IEC61000-3-3 / IEC61000-3-11 / IEC61000-3-12


POWER QUALITY

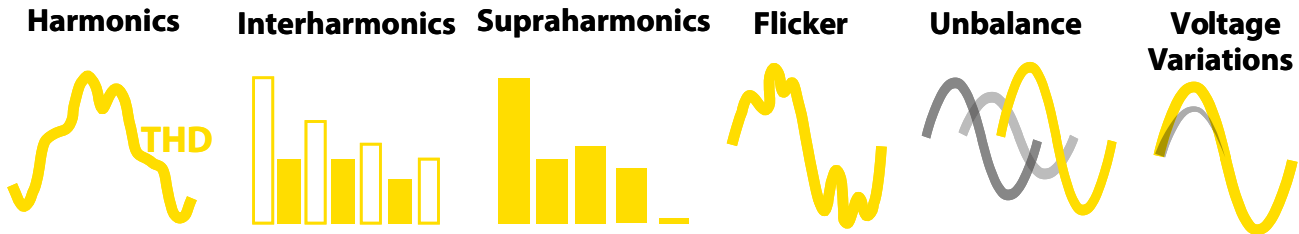

according to IEC 61000-4-30 Ed.3 and IEC 62586

Harmonics (Voltage, Current, Phi, Power)	Class A
Interharmonics	Class A
THD U, THD I	Class A
Higher Frequencies (200Hz band)	2 - 9 kHz (can be calculated from 0 to definable upper limit)
Higher Frequencies (200Hz band & 2 kHz band)	20 kHz for voltage and current
Symmetrical Components & Unbalance (Pos-, Neg- and Zero Sequence)	Class A
Rapid Voltage Changes	Class A
Flicker (PST, PLT, Pinst)	Class A
Voltage Events (dip, swell, interruption – time, extrema, length)	Class A
Frequency	10 sec, AVE, MIN, MAX
Voltage, Current	RMS, AVE, MIN, MAX, ½ Period-values, 200ms, 10s, 10min
Time Synchronisation	Class A

DISTURBANCES AND SYSTEM DYNAMICS

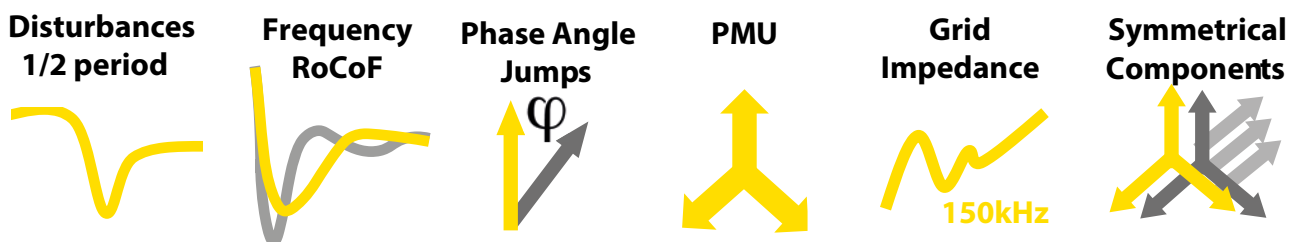

1/2 PERIOD TRIGGER	U, I, P, Q, S, f, PF, phi, THD, Harmonics, Interharm., Unbalance, etc.	
PHASE ANGLE TRIGGER	phi	
SYMMETRICAL COMPONENTS	Pos., Neg., Zero sequence	
RATE OF CHANGE FREQUENCY (ROCOF)	df/dt	
Phasor Measure Unit (PMU) according to IEEE C37.118	Total Vector Error	0.01% (typ.)
	Angle Error	0.003°(typ)
	Timestamp Accuracy	0.1 µs
	up to 50 fps / via TCP / open PDC format / Offline storage possible	

ADDITIONAL FEATURES INCLUDE

- ✓ compounded trigger settings
- ✓ definable pre-triggers and post-time extensions

VOLTAGE MEASUREMENT

HIGH VOLTAGE DIVIDERS, TRANSFORMERS AND ISOLATED TRANSDUCERS



We offer different types of high-voltage adapters for measurements above 1600V DC. The portfolio covers voltage dividers, voltage transformers and isolated voltage dividers. Please contact your local sales partner or support@neo-messtechnik.com.

ALIGATOR CLIP



Current	max. 36A
Voltage	CAT III 1000V / CAT IV 600V
Colours	red, black, blue, green, yellow, white, purple, brown, grey, yellow-green
Plugs	Ø 4 mm
Dimensions	92 x 38 mm

SAFETY TEST LEAD



Current	max. 25A
Voltage	CAT III 1000 V
Cross Section	1,5 mm ²
Colours	red, black, blue, green, yellow, white, purple, brown, grey, yellow-green
Plugs	Ø 4 mm
Length	0,25 m / 1 m / 2 m ... others on request

SAFETY TEST LEAD FUSED



Current	max. 25 A (Fuse: 0.5A)
Voltage	CAT III 1000 V
Cross Section	1,5 mm ²
Colours	red, black, blue, green, yellow, white
Plugs	Ø 4 mm
Length	0,25 m / 1 m / 2 m ... others on request

AC CLAMPS

AC CLAMPS

CLAMP-5AC



Type	Iron-Core		
Range	5 A		
Bandwidth	20 kHz		
Accuracy	0,5 - 6A: 0,1 - 0,5A: 5mA - 0,1 A:	± 0,5 % of reading ± 1 % of reading ± 2 % of reading	(with NEO calibration typ. ≤ 0.2 %) (with NEO calibration typ. ≤ 0.3 %) (with NEO calibration typ. ≤ 0.8 %)
Phase	1 - 12A: 0,5 - 1A: 5mA - 0,5 A:	± 0,5 ° ± 1 ° ± 2 °	(with NEO calibration typ. ≤ 0.5 °) (with NEO calibration typ. ≤ 0.5 °) (with NEO calibration typ. ≤ 1 °)
Sensitivity	100 mV/A		
Dimensions	102 x 34 x 24 mm (Clamp Opening d = 15mm)		

CLAMP-20AC



Type	Iron-Core		
Range	20 A		
Bandwidth	20 kHz		
Accuracy	0,5 - 20A: 5mA - 0,5 A:	± 1 % of reading ± 2 % of reading	(with NEO calibration typ. ≤ 0.5 %) (with NEO calibration typ. ≤ 1 %)
Phase	0,5 - 20A: 5mA - 0,5 A:	± 2 ° ± 2 °	(with NEO calibration typ. ± 0.5 °) (with NEO calibration typ. ± 1 °)
Sensitivity	10 mV/A		
Dimensions	102 x 34 x 24 mm (Clamp Opening d = 15mm)		

CLAMP-200AC



Type	Iron-Core		
Range	200 A		
Bandwidth	10 kHz		
Accuracy	100 - 240 A: 10 - 100 A: 0,5 - 10 A:	± 1% of reading ± 2,5% of reading ± 3,5% of reading	(with NEO calibration typ. ≤ 0.8 %) (with NEO calibration typ. ≤ 1 %) (with NEO calibration typ. ≤ 2 %)
Phase	100 - 240 A: 10 - 100 A: 0,5 - 10 A:	≤ 2,5° ≤ 5° not specified	(with NEO calibration typ. ≤ 1.5°) (with NEO calibration typ. ≤ 3°)
Sensitivity	10 mV/A		
Dimensions	135 x 51 x 30 mm (Clamp Opening d = 22mm)		

CLAMP-1000AC



Type	Iron-Core		
Range	1000 A		
Bandwidth	10 kHz		
Accuracy	100A - 1200 A : 10A - 100 A: < 1A:	0,3% 0,5% 2 %	(with NEO calibration typ. ≤ 0.2 %) (with NEO calibration typ. ≤ 0.3 %) (with NEO calibration typ. ≤ 1 %)
Phase	100A - 1200 A: 10A - 100 A: < 1A:	0,7° 1° not specified	(with NEO calibration typ. ≤ 0.3°) (with NEO calibration typ. ≤ 0.5°)
Sensitivity	1 mV/A		
Dimensions	216 x 111 x 45 mm (Clamp Opening d = 53mm)		

CENTER ADAPTER



This adapter can be used for small cable diameters to optimize the cable position and improve accuracy. This adapter is available upon request for all current sensors.

AC COILS & SPLIT-CORE

AC ROGOWSKI COILS

FLEX-MINI-3000



Type	Rogowski coil
Range	30A / 300A / 3000A / 30kA
Bandwidth	PQA7000: up to 20 kHz PQA8000: up to 70 kHz PQA8000H: up to 500 kHz
Accuracy	1% (with NEO calibration typ. ≤ 0.3 %)
Coil Length	170 mm (Ø 45 mm)

FLEX 3000



Type	Rogowski coil
Range	30A / 300A / 3000A / 30kA
Bandwidth	PQA7000: up to 20 kHz PQA8000: up to 70 kHz PQA8000H: up to 500 kHz
Accuracy	1% (with NEO calibration typ. ≤ 0.3 %)
Coil Length	450 mm (Ø 125 mm)

FLEX 6000




Type	Rogowski coil
Range	30A / 300A / 3000A / 30kA
Bandwidth	PQA7000: up to 20 kHz PQA8000: up to 70 kHz PQA8000H: up to 500 kHz
Accuracy	1% (with NEO calibration typ. ≤ 0.3 %)
Coil Length	800 mm (Ø 250 mm)

Flexible Length, Flexible Coil Diameter, Flexible Bandwidth, Flexible Scaling, Flexible cable length on request
Rogowski Coils for measurements up to 150kA are available.



All measurement ranges from 30A to 120.000A

RESIDUAL CURRENT SENSOR AC+DC (RCM)

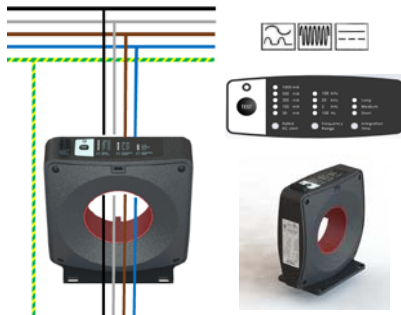

Type	Fluxgate
Range	DC and AC residual current measurement of Type B/B+ in the range 0-2Arms
Bandwidth	100 kHz
Application	Single Phase, 3-Wire, 4-Wire
Rated Voltage	690V
Rated Current	100A / 300A
Output	4-20mA Relay Output (DO/DI)
Power Supply	24V DC
Dimensions	156.1mm x 151.1mm x 69.4mm (Clamp Opening Ø 70 mm)

AC/DC HALL CLAMPS

AC/DC HALL CLAMPS

CLAMP-300DC



Type	Hall sensor
Range	300A DC
Bandwidth	DC to 150 kHz
Accuracy	1 % + 2 mA (with NEO calibration typ. ≤ 0.3 %)
Sensitivity	20 mV/A
Overload Capability	500A DC (1min)
Dimensions	205 mm x 60 mm x 15 mm (Clamp opening d = 32 mm)

CLAMP-2000DC



Type	Hall sensor
Range	2000A DC
Bandwidth	DC to 20 kHz
Accuracy	2.5 % +/- 0.5A (with NEO calibration typ. ≤ 1.5 %)
Sensitivity	1 mV/A
Dimensions	205 mm x 60 mm x 15 mm (Clamp opening d = 32 mm)

AC/DC SPLIT CORE

SPLIT-300DC



Type	Hall sensor
Range	300A DC
Bandwidth	DC to 150 kHz
Accuracy	1 % + 2 mA (with NEO calibration typ. ≤ 0.3 %)
Sensitivity	10 mV/A
Dimensions	205 mm x 60 mm x 15 mm (Clamp opening d = 32 mm)

ICS-10A




Type	Hall sensor
Range	10 A peak (Overload Capability 80A for 1sec)
Bandwidth	150 kHz
Accuracy	0.5% (with NEO calibration typ. ≤ 0.1 %)
Sensitivity	208 mV/A
Dimensions	62 mm x 42 mm x 25 mm
Safety Category	CAT II 1000V / CAT III 600V

IPCS-XXA




Type	Zero-Flux transducer
Range	IPCS-10A: 10A rms IPCS-25A: 25A rms IPCS-50A: 50A rms
Bandwidth	500 kHz
Accuracy	0.01%
Sensitivity	IPCS-10A: 40 mV/A IPCS-25A: 20 mV/A IPCS-50A: 10 mV/A
Dimensions	130 mm x 65 mm x 50 mm
Safety Category	CAT II 600V

WORLD LEADING TECHNOLOGY

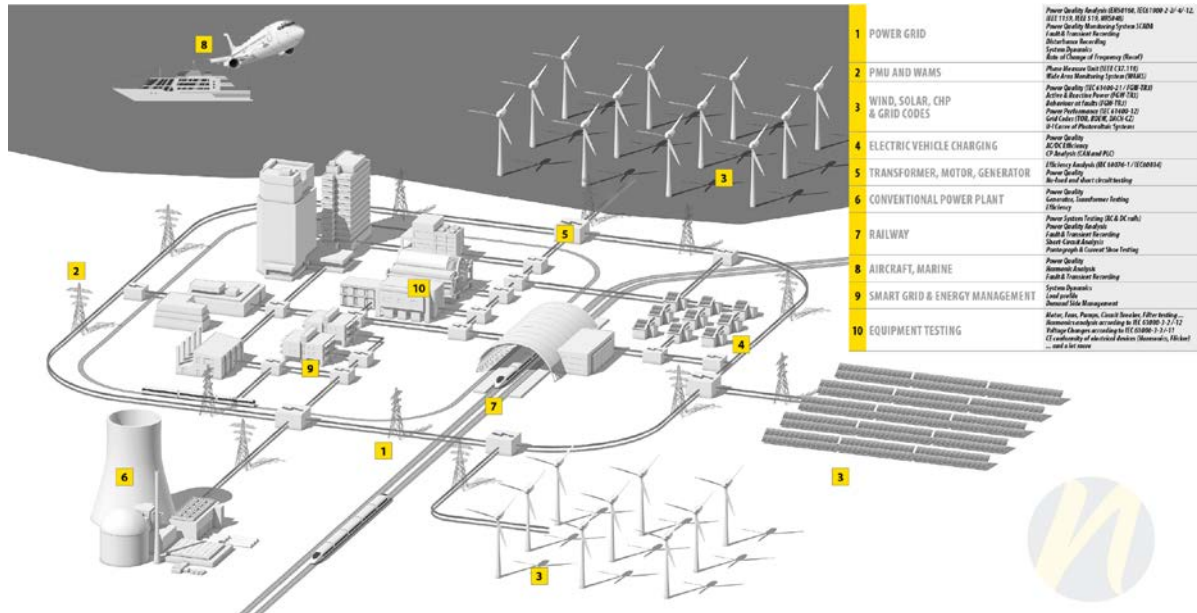


POWER QUALITY

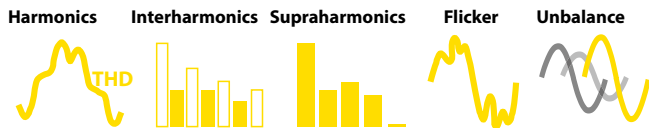


WAVEFORM & TRANSIENTS



POWER

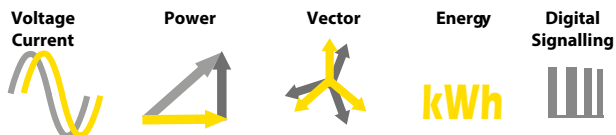

DISTURBANCES AND SYSTEM DYNAMICS

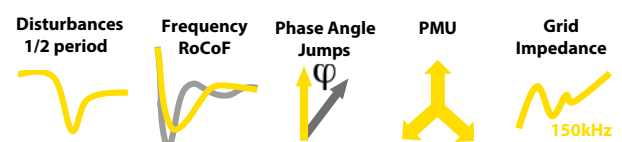

CONTACT

AUSTRIA

NEO Messtechnik GmbH
Sonnweg 4
2871 Zöbern
sales@neo-messtechnik.com

SWITZERLAND

Schotec AG
Moosacherstrasse 15
CH 8804 Au (bei Zürich)
sales@neo-messtechnik.com



www.neo-messtechnik.com